



KONICA MINOLTA

JETvarnish 3D Web DATASHEET

- ✓ Digital Web-Fed Solution
- ✓ For in-line spot UV Coating,
embossed hot-foiling, die cutting & slitting

The MGI JETvarnish 3D Web is the ideal solution for label printers as well as flexible packaging producers, who are looking for a digital way to differentiate their services. The web-solution turns printed jobs into remarkable products that will immediately catch the attention of your customers. The growing label and flexible packaging markets are expecting higher flexibility, shorter run lengths, faster delivery times and personalisation. With the JETvarnish 3D Web it is easy to highlight defined areas or add tactile 3D effects to digital, flexo or offset jobs. In combination with the inline hot foiling module it is the perfect device to achieve high added value and differentiation.



MGI
Digital Technology

JETVARNISH 3D Web
Digital varnish & iFOIL

YOUR ADVANTAGES WITH THE JETvarnish 3D WEB



IFOIL TECHNOLOGY

- For digital and variable 2D and 3D varnish and foil embellishments
- Added value for self-adhesive labels as well as flexible packaging
- Metallic, holographic and coloured foil from 100 up to 420 mm width can be used

DIE CUTTING UNIT

- Optional semi rotary die cutting unit to finish labels in-line
- 2 slitter knives as standard (10 max)
- Gap master system as an option






WIDE COMPATIBILITY

- The JETvarnish 3D Web is compatible with digital, flexo and offset web-to-web printing technologies, which are used to produce labels as well as flexible packaging
- Applies spot UV varnish and hot-foil on coated & uncoated materials, synthetics, paper as well as light cardboard (e.g. beverage, cosmetics & healthcare, label, wine, etc.)

EASE OF USE

- While it should be emphasized that the JETvarnish 3D Web is not a push button press, you will quickly understand how the device works, as it is relatively easy to use
- There is less "make-ready" or other special skills required
- For maximum ease of operation
- Frees operators for other jobs

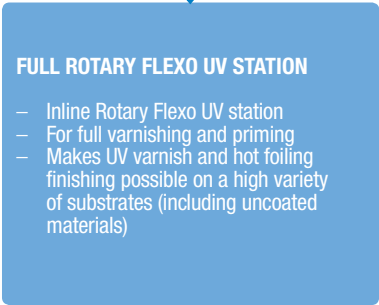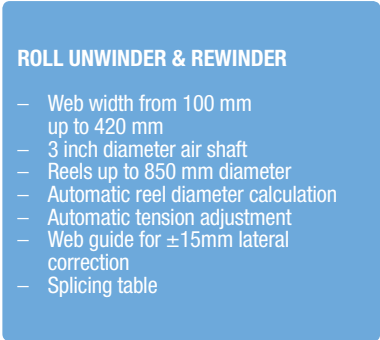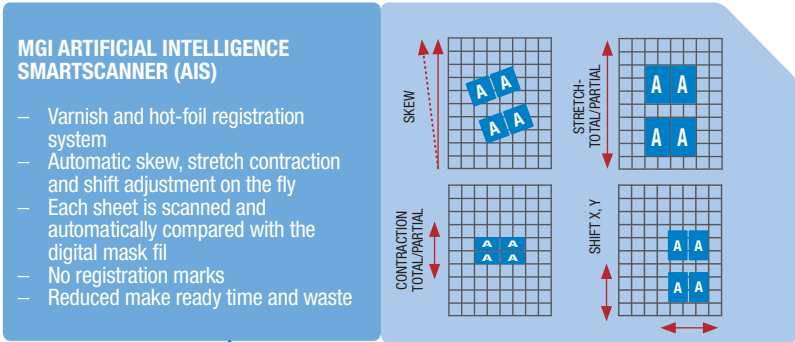

Technical specifications

Printing Speeds	Up to 42m/mn ¹ (depending on application).
Supported Web Widths	From 100 mm up to 420 mm
Finishing Width	The maximum image width is 405 mm
Substrate Types²	From 50 up to 400 microns (µm) Coated, uncoated and textured paper, film or label Self-adhesive labels White or transparent synthetics, PP, PE, POPP, PET Light cardboard/folding carton Shrink film: PVC, PETG
Wide Compatibility	Compatible with the overall web-to-web printing Technologies, narrow web digital presses and the traditional offset or flexo narrow web presses.
Unwinder	Maximum roll diameter capacity: 850 mm Standard inside core diameter: 3 inches Maximum roll weight: ±120 kg
UV Flexo Station	An integrated flexo station for full size sleeve coating in rotary. This station is used to apply a UV protection varnish or primer prior to finishing. The module comes with an UV dryer. The station is equipped with an anilox cylinder. Additional anilox cylinders are available as upgrade options.
Spot UV Coating and Embossing Station	This station uses MGI award-winning inkjet technology for producing Spot UV Coating. Any defined label area can receive Spot UV Coating with or without raised 3D texture effects. A simple grey level TIFF file designed by Prepress controls the surface area and the thickness of the varnish applied over the printed roll. This 100 % digital process eliminates traditional plates, screens and dies.
Varnish thickness	From 7 ² to 232 ² µm of varnish thickness (from 2D flat coats to 3D raised effects).
Inline curing	The unit is equipped with an UV dryer and a cooling drum for optimum web temperature control. The curing sequence also includes a special forward and backward roll motion to dry each label and eliminate waste between runs.
UV Varnish	Gloss varnish 99 GU
Hot Foiling Station	The hot foiling station adds luxurious effects and brand value to label and packaging products. Any defined label area can receive digitally-controlled foil with or without raised effects. A simple grey level TIF file designed by Prepress controls the surface area and the definition of the foil applied on the printed roll. This 100 % digital process eliminates traditional dies, plates and screens. Foil application can be bypassed when not necessary.
Foil rolls	Foils are delivered on rolls: Foil widths from 100 mm up to 420 mm Foil roll core diameter: 1" and 3" Foil lengths from 400 m up to 2,000 m Up to 3 rolls can be used simultaneously during the production

Die Cutting Unit	A semi-rotary die cutting unit is available as an option to finish labels in-line on the JETvarnish 3D Web. The unit uses a 21" magnetic cylinder and an automatic registering system. 2 slitter knives are included as well as a matrix rewinder. format in semi-rotary: 100 up to 480 mm maximum matrix diameter: 600 mm 2 slitter knives as standard: 10 max Gap master system for die height adjustment as an option.
Rewinder	Servo-motorized unit 850 mm maximum roll diameter capacity Standard inside core diameter: 3 inches Maximum roll weight: ± 120 kg
Printing Press Compatibility List	Digital: Konica Minolta AccurioLabel, HP Indigo WS4500, HP Indigo, WS6800, Epson, Xeikon, EFI, Durst, etc. Offset: All manufacturers and technologies: UV, H ₂ O or WATERLESS Flexo: All manufacturers and technologies: UV or Water based
Dimensions & Weight	Up to 11.85 ³ x 1.58 x 1.81 m (L x W x H) 1 meter clearance required on all 4 sides Weight: ± 4,447 kg ³
Technical Requirements	400 V - 3Ph 240 V - 1Ph Dry air compressor (oil-free): 8 bar/102 psi - 24 m ³ /h/6 cfm All speeds are nominal

Available options

Corona substrate treatment module	In-line system made to optimise varnish adhesion on complex printed substrates
Variable Data Printing	To manage and edit files on the workstation, Full variable data (text, graphic, image) for both 2D/3D Spot Coating and Hot Foiling areas, Integrated barcode (1D/2D) reader system & controller, Raster Image Processor (RIP) as an option

¹ speed will vary according to printing parameter used

² confirm substrate compatibility with Konica Minolta

³ depending on the configuration

The support and availability of the listed specifications and functionalities varies depending on applications as well as system configurations. The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size. The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity. Some of the product illustrations contain optional accessories. Specifications and accessories are based on the information available at the time of printing and are subject to change without notice. Konica Minolta does not warrant that any prices or specifications mentioned will be error-free. All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.